

Promoting Non-Cooperation Through Ordering

David Sychrovsky
Charles University
Prague, Czechia
sychrovsky@kam.mff.cuni.cz

Sameer Desai
Charles University
Prague, Czechia
sameer@kam.mff.cuni.cz

Martin Loebel
Charles University
Prague, Czechia
loebel@kam.mff.cuni.cz

ABSTRACT

In many real world situations, like minor traffic offenses in big cities, a central authority is tasked with periodic administering punishments to a large number of individuals. Common practice is to give each individual a chance to suffer a smaller *fine* and be guaranteed to avoid the legal process with probable considerably larger punishment. However, thanks to the large number of offenders and a limited capacity of the central authority, the individual risk is typically small and a rational individual will *not* choose to pay the fine. Here we show that if the central authority processes the offenders in a publicly known order, it properly incentivizes the offenders to pay the fine. We show analytically and on realistic experiments that our mechanism promotes non-cooperation and incentivizes individuals to pay. Moreover, the same holds for an arbitrary coalition. We quantify the expected total payment the central authority receives, and show it increases considerably.

KEYWORDS

mechanism design; non-cooperation

ACM Reference Format:

David Sychrovsky, Sameer Desai, and Martin Loebel. 2023. Promoting Non-Cooperation Through Ordering. In *Proc. of the 22nd International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2023)*, London, United Kingdom, May 29 – June 2, 2023, IFAAMAS, 9 pages.

1 INTRODUCTION

In this work, we study a special case of a classic dilemma, how to effectively enforce a rule in a large population with only a very small number of enforcing agents. This task is impossible if the large population cooperates and thus a critical aspect of any suggested mechanism is the promotion of non-cooperation. A well-known count Dracula way is to make the punishment for breaking the rule extremely severe. We suggest an alternative mechanism, for a special case of the dilemma motivated by collecting fines for traffic violations.

In many large cities, there is a huge number of traffic offences, highly exceeding the capacity of state employees assigned to manage them. The assigned state employees should primarily concentrate on serious and repetitive offenders. However, a large number of minor offences are still to be settled which makes the former considerably harder. A common practise is that a smaller *fine* is assigned in an almost automated way and if an offender settles this fine then the legal process does not start. Otherwise, the legal process should start with considerably larger cost for the offender. The offence is also forgotten after a certain *judiciary period*.

However, thanks to the limited capacity of state employees, legal processes for non-repetitive minor traffic offenses are typically enforced in a small number of cases¹. The individual risk is thus small and a large fraction of the offenders *choose* to ignore the fine. In this paper, we propose a simple mechanism which properly incentivizes the offenders to pay the fine even under these conditions.

1.1 Main Contribution

In our proposed mechanism, the central authority processes the offenders in a given order. Each offender is aware of his position in this ‘queue of offenders’ and has the option of publicly donating money to a fund of traffic infrastructure or a charity predetermined by the central authority. If their total donations amount to at least the fine, it is used to settle the offence. After the judiciary period expires, or if the legal process is started, the fund retains the individual donation. The central authority periodically sorts the offenders in ascending order of their average donation, and starts the legal process with those who paid the least on average.

Compared to processing the offenders in random order, this mechanism increases the individual risk of some offenders. This incentivizes them to pay the fine, which in turn puts others in danger. We show both analytically and on realistic experiments that under the proposed mechanism, the strategic behaviour of the offenders is to engage with the mechanism, and quantify the expected revenue of the charity. Moreover, we show it is not beneficial for any group of offenders to ignore the mechanism and share the cost of those who enter the legal process. Finally, we study how the central authority can most efficiently use its limited capacity to maximize the revenue of the charity.

1.2 Related Work

To our best knowledge, the field of non-cooperative mechanism design has not been studied extensively yet. Our approach is somewhat similar to that of [2], where the authors consider a variation of the elimination game which includes bids.

Our model can also be viewed as a generalization of the stopping games [5], where participants choose a time to stop bidding and trade off their gain from outlasting other players for the cost accumulated over time in the game. In our case, the ‘prize’ won by the lowest paying participant is cost of entering the legal process.

However, both approaches did not consider the ranking of players, which is at the core of our mechanism.

2 PROBLEM DEFINITION

Informally, we model the interaction of agents as a game we call *Queue*. Queue consists of a finite sequence of *Round*, in which each

Proc. of the 22nd International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2023), A. Ricci, W. Yeoh, N. Agmon, B. An (eds.), May 29 – June 2, 2023, London, United Kingdom. © 2023 International Foundation for Autonomous Agents and Multiagent Systems (www.ifaaamas.org). All rights reserved.

¹For instance, in the city of Prague considerably more than 100 000 such offenses are dismissed every year because the judiciary period expires.

agent can choose to pay, however with some probability they forget and pay nothing. Those who paid at least the fine in total, or spent enough time in Queue are removed. The rest is ordered according to the amount they paid on average. A fixed number of those at the start are then forced to pay a large penalty, and leave Queue. Let us now define the interaction formally, starting with how Round is realized.

2.1 Round: One Step in Queue

Round is a parametric game $\mathbb{O}(\mathcal{N}) = \mathbb{O}(\mathcal{N}, F, Q, T, k, p)$, where \mathcal{N} is an ordered subset of agents², $F \in \mathbb{N}$ is the fine, $Q > F$ is the cost associated with entering the legal process, $T \in \mathbb{N}$ is the judiciary period, i.e., the number of Round instances after which agents are removed, $k \in \mathbb{N}$ is the number of agents forced to pay Q in each Round, $p \in [0, 1]$ is the probability of ignorance.

Each $a \in \mathcal{N}$ is characterized by a triplet (n_a, t_a, m_a) and his strategy π_a . The triplet corresponds to his *observations* – his position n_a in \mathcal{N} , the number t_a of past Round games he participated in, and his total individual payment m_a in the past Round games.

Round proceeds in three phases

- (1) Each agent $a \in \mathcal{N}$, based on his observation, declares his strategy for this Round $\pi_a \in \Delta^{F+1}$, where Δ is the probability simplex. His payment μ_a is then sampled from³

$$\mu_a \sim p\sigma^0 + (1-p)\pi_a(n_a, t_a, m_a), \quad (1)$$

where σ^v is the pure strategy of paying v .

- (2) Each agent's total payment and time is updated

$$m_a \leftarrow m_a + \mu_a, \quad (2)$$

$$t_a \leftarrow t_a + 1, \quad (3)$$

and \mathcal{N} is sorted⁴ according to the ratio of current total payment and time m_a/t_a .

- (3) Some agents are removed from \mathcal{N} , which is done in three sub-phases. We call such agents *terminal* and denote the set of terminal agents in this Round as \mathcal{T} .
 - (a) All agents $a \in \mathcal{N}$ with $m_a \geq F$ are removed.
 - (b) First k agents in \mathcal{N} have their m_a increased by Q and are removed.
 - (c) All agents $a \in \mathcal{N}$ with $t_a \geq T$ are removed.

The result of each Round is the ordered set of agents $\mathcal{N} \setminus \mathcal{T}$, and the set of terminal agents \mathcal{T} . Only the terminal agents are assigned their final utility.

Definition 2.1 (Utility). The utility of each agent $a \in \mathcal{T}$ is the negative amount he paid

$$u_a = -m_a. \quad (4)$$

2.2 Queue: A Game on Updating Sequences

Formally, Queue is $\mathbb{G} = \mathbb{G}(F, Q, T, k, p, x, x_0, w)$, where F, Q, T, k and p have the same meaning as in Section 2.1, x is the number of entering agents after each Round, x_0 is the initial size of \mathcal{N} and w is the horizon, i.e. the number of repetitions of Round.

²The agents are ordered according to their average payment in ascending order, i.e. those who paid the least on average are sorted to the front of \mathcal{N} .

³This simulates that with probability p , the agent forgot to act in this Round.

⁴We use stable sort, i.e. whenever there is a tie, the original order is preserved.

Queue aggregates Round in the following two simple phases. Starting with \mathcal{N}^1 s.t. $|\mathcal{N}^1| = x_0$, and $m_a, t_a = 0$ for each $a \in \mathcal{N}^1$. We repeat them w -times.

- (1) The agents in \mathcal{N}^t play Round and non-terminal agents proceed to the next iteration.

$$\mathcal{N}^{t+1}, \mathcal{T}^{t+1} \leftarrow \mathbb{O}(\mathcal{N}^t). \quad (5)$$

- (2) x new agents enter the game

$$\mathcal{N}^{t+1} \leftarrow \mathcal{N}^{t+1} \cup X, \quad (6)$$

where X is a set of agents with $m_a, t_a = 0$, and $|X| = x$. These new agents are sorted to the end of \mathcal{N}^{t+1} .

In the last Round, all agents terminate, $\mathcal{T}^w \leftarrow \mathcal{T}^w \cup \mathcal{N}^w$.

The new agents come from universum U . The strategy of all agents is then given as $\pi = \times_{a \in U} \pi_a$. We denote space of all such strategies as Π .

Each agents wants to choose strategy π_a , which maximizes their utility in \mathbb{G} given strategies of other agents π_{-a} . A strategy profile $\pi \in \Pi$ is an equilibrium, if no agent can increase his utility. Formally,

Definition 2.2 (ϵ -Equilibrium). $\pi \in \Pi$ is an ϵ -equilibrium of \mathbb{G} if $\forall \bar{\pi} \in \Pi, \forall t \in \{1, \dots, w\}$ and $\forall a \in \mathcal{T}^t$,

$$\mathbb{E}_\pi [u_a(\pi)] \geq \mathbb{E}_{(\bar{\pi}_a, \pi_{-a})} [u_a(\bar{\pi}_a, \pi_{-a})] - \epsilon. \quad (7)$$

We note that the equilibrium always exists which can be shown by a standard transformation to a normal form game.

2.3 Avalanche Effect

Intuitively, every agent wants to pay as little as possible, while avoiding paying Q . This translate to paying more than the others. However, if all agents adapt this reasoning, the only option to avoid paying Q is to pay F . We formally show this in Section 3.1

Crucially, not all other agents can use this reasoning thanks to the probability of ignorance. But as that vanishes, the agents should be incentivised to pay more. Similarly, if the number of entering agents increases, so should the total payment. We formally capture this in the *avalanche effect*.

Definition 2.3 (Avalanche effect). We say that Queue exhibits the *avalanche effect* if at least one of the following holds in equilibrium when changing p , or x .

- (1) The expected terminal payment of all agents is decreasing as $p \rightarrow 0^+$

$$\lim_{p \rightarrow 0^+} \frac{d}{dp} \sum_{a \in \mathcal{T}} m_a < 0. \quad (8)$$

- (2) The expected terminal payment of all agents decreases slower than $1/x$ as $x \rightarrow \infty$

$$\lim_{x \rightarrow \infty} \sum_{a \in \mathcal{T}} m_a = \infty. \quad (9)$$

2.4 Division Problem

In our model, the judiciary period is split into T equal time intervals and sorted at the start of each interval. The central authority can process kT offenders over the judiciary period, and xT will enter the system.

The central authority can influence the system in two ways.

- (1) it can choose how often the sorting takes place, and
- (2) it can virtually split the entering offenders into g groups of size x/g , and process k/g offenders in each.

The *Division problem* is how to set T and g to maximize the expected revenue the central authority receives. We refer to the two cases as *Time-Division problem* and *Group-Division problem* respectively.

3 ANALYTIC SOLUTION

As described in Section 1, the individual risk when the central authority processes the agents in random order is typically small, i.e. $kQ/|N| \ll F$. Each agent is also guaranteed to pay $kQ/|N|$ if everyone cooperates and shares the costs of those entering the legal process. Let us begin by showing that this is not the case in our proposed system. That is, there is no coalition can benefit from choosing to pay nothing and share the cost of those forced to pay Q . In our setting, this is analogous to coalition proofness.

PROPOSITION 3.1. *Let \mathcal{A} be a set of agents using strategy $\pi_a = \sigma^0 \forall a \in \mathcal{A}$, and sharing the cost, i.e. their utility becomes*

$$\tilde{u}_a = -\frac{1}{|\mathcal{A}|} \sum_{i=1}^w \sum_{a \in \mathcal{A} \cap \mathcal{T}^i} m_a, \quad \forall a \in \mathcal{A}.$$

If $\tilde{u}_a > 0$, then $\exists a' \in \mathcal{A}$ s.t. a' can deviate and increase his utility.

PROOF. We split the proof into two parts according to how much an individual needs to contribute.

- (1) $0 < \tilde{u}_a < Q$: In this situation, not all agents of \mathcal{A} were forced to pay Q . Consider the agent $a' \in \mathcal{N}$ who terminated last. Then, since a' paid zero, his original utility is zero and $\tilde{u}_a > u_a$. Therefore, a' would benefit from leaving \mathcal{A} .
- (2) $\tilde{u}_a = Q$: In this case, all agents were forced to enter the legal process. Any $a \in \mathcal{A}$ would therefore benefit from paying the fine, since then $u_a = F < Q = \tilde{u}_a$.

□

While existence of an analytic solution of Queue remains an open question, we can find it in certain special cases.

3.1 Active participants

Let us first focus on a situation when no agent forgets to participate in Round, i.e. $p = 0$. Then it is easy to see that $\pi_a = \sigma^F$ is unique equilibrium. Consider the first agent $a \in \mathcal{N}$ in the first Round, who chose to pay $\mu_a < F$. Then he is forced to pay Q , resulting to utility $u_a = -Q - \mu_a < -F$. Therefore, switching to paying F is beneficial and the strategy of paying $\mu_a < F$ is not an equilibrium. This means all agents will pay F in the first Round, and the situation thus repeat in the following Round.

3.2 w-Fines: Special Case of Queue

Let us focus on the system without the introduction of the option to donate a portion of the fine. Thus after scaling currency we can let $F = 1$, and there are only two pure strategies σ^0, σ^F the agents can take. If now $T = w$ and no agents are added after each Round $x = 0$, we call the game *w-Fines*.

Definition 3.2 (w-Fines). Let $w \in \mathbb{N}$, then we refer to reduced Queue $\mathbb{F}(w, F, Q, k, p, x_0) = \mathbb{G}(F, Q, w, k, p, 0, x_0, w)$ as *w-Fines*.

We begin by showing a crucial property of *w-Fines*.

LEMMA 3.3. *In the w-Fines, the expected payment of $\forall a \in \mathcal{N}$ depends only on the actions of agents in front of a .*

PROOF. If a pays zero, he remains in the Queue and is sorted in front of agents who were behind him. He is potentially forced to pay Q , depending on the actions of agents in front of him. If he pays $F = 1$, he is removed. In either case, the actions of agents behind a have no impact on his payment. □

In each Round, $a \in \mathcal{N}$ has $n_a - 1$ agents in front of him. Due to the probability of ignorance, even if all the agents decide to pay, a can estimate the probability that at most $k - 1$ will forget. If that happens, a will be forced to pay Q in this Round. Formally,

Definition 3.4. Let n be a positive integer. We denote by $\alpha(p, n, k)$ the probability that in $n - 1$ independent coin tosses with the head probability p , the number of heads is less than k .

Since α will be important in the following discussion, we briefly mention some of its properties.

LEMMA 3.5. *Let $k < np$, then $\alpha(p, n + 1, k) \leq e^{-\frac{(np-k)^2}{2np}}$.*

PROOF. Let ξ_i denote the random variable such that

$$\xi_i = \begin{cases} 1 & \text{w.p. } p, \\ 0 & \text{otherwise,} \end{cases}$$

and $\xi^n = \sum_{i=1}^n \xi_i$. Thus, $\mathbb{E}[\xi_i] = p$ and $\mathbb{E}[\xi^n] = np$. As per the Chernoff

bounds, $\mathbb{P}[\xi^n \leq (1 - \delta)np] \leq e^{-\frac{\delta^2 np}{2}}$, for all $0 < \delta < 1$. Thus $\alpha(p, n + 1, k) = \mathbb{P}[\xi^n \leq k] \leq e^{-\left(1 - \frac{k}{np}\right)^2 np/2} = e^{-\frac{(np-k)^2}{2np}}$. □

PROPOSITION 3.6. *If $\alpha(p, n, k) \leq F/Q \leq \frac{1}{4}$ then $np > k$. Moreover for large enough n , $\alpha(p, n, k) \geq \alpha(p, 2n, 2k)$.*

PROOF. For $\gamma \sim B(n, p)$ if $p < 1 - \frac{1}{n}$, then $\frac{1}{4} < \Pr(\gamma \leq np)$ [4]. Therefore, when $\frac{1}{4} \geq \frac{F}{Q}$, then $k < np$. Further, we note that Lemma 3.5 is tight for large enough np . Hence, it suffices to prove the proposition for the upper bound $e^{-\frac{(np-k)^2}{2np}}$ for which the statement clearly holds. □

Finally, we formulate a conjecture that if true, would allow us to extend the analytic study of the division problem presented below.

CONJECTURE 3.7. *For $pn > k$, $\alpha(p, n, k) \geq \alpha(p, n + n/p, 2k)$.*

3.2.1 Single Sorting Instance. We start by analysing the 1-Fines game, which is equivalent to one Round. In this case, when an agent is sufficiently far from the start of \mathcal{N} , it is beneficial to pay nothing, while near the start it is beneficial to pay and avoid paying Q . The boundary between the two will prove important.

Definition 3.8 (Critical strategy). Let $r \in \mathbb{N}$ be the smallest such that $\alpha(p, r, k)Q \leq F$. Then r is called *critical position*.

The *critical strategy* is

$$\pi_a^{\text{crit}}(n_a, t_a, m_a) = \begin{cases} \sigma^F & \text{if } \alpha(p, n_a, k)Q > F, \\ \sigma^0 & \text{otherwise.} \end{cases} \quad (10)$$

We note that $t_a = 1$ and $m_a = 0 \forall a \in \mathcal{N}$ for 1-Fines. We will show that π_a^{crit} is the only equilibrium of the 1-Fines. First, we define α^{crit} as the probability with which an agent is forced to pay Q when all agents follow π_a^{crit} .

PROPOSITION 3.9. *Let r be the critical position. Then if agents follow $\pi_a^{\text{crit}}, \forall a \in \mathcal{N}$ are forced to pay Q w.p.*

$$\alpha^{\text{crit}}(p, r, n_a, k) = \begin{cases} \alpha(p, n_a, k) & \text{if } n_a < r, \\ \alpha(p, r, k - (n_a - r)) & \text{otherwise.} \end{cases} \quad (11)$$

PROOF. Fix $a \in \mathcal{N}$. When $\alpha(p, n_a, k) > F/Q$ (i.e. $n_a < r$), then agents in front of a pay F and thus a will not pay Q only if enough of them forget. If $n_a \geq r$, then $n_a - r$ agents choose not to pay. Therefore, a only needs $k - (n_a - r)$ of the r agents to forget. \square

Observe that $\alpha^{\text{crit}} \leq \alpha$, since some agents may choose to pay zero. Also, by Definition 3.4, $\alpha^{\text{crit}} = 0$ for $n_a > r + k$.

PROPOSITION 3.10. *Let r be the critical position and let all agents follow π_a^{crit} , except for $a \in \mathcal{N}$, whose strategy is $\pi_a = (q, 1 - q)$. Then the expected payment of a is*

$$(1 - p - q)F + (p + q)\alpha^{\text{crit}}(p, r, n_a, k)Q. \quad (12)$$

PROOF. By definition of π_a , a pays F w.p. $1 - p - q$ and he does not forget. If he does, or pays zero w.p. q , he is forced to pay Q w.p. $\alpha^{\text{crit}}(p, r, n_a, k)$. \square

COROLLARY 3.11. *Let r be the critical position and let all agents follow π_a^{crit} . Then the expected payment of $a \in \mathcal{N}$ is*

$$G_a^1(p, n_a, k) = \begin{cases} (1 - p)F + p\alpha^{\text{crit}}(p, r, n_a, k)Q, & \text{if } n_a < r, \\ \alpha^{\text{crit}}(p, r, n_a, k)Q, & \text{otherwise.} \end{cases} \quad (13)$$

THEOREM 3.12. *The strategy π_a^{crit} is unique equilibrium of 1-Fines.*

PROOF. Consider $a \in \mathcal{N}$ in the sorted order. We will show by induction π_a^{crit} is a unique best-response to strategies of agents in front of a given agent. For the first agent, π_a^{crit} clearly maximizes the utility $-G_a$ of a . In the induction step we assume a' in front of a follow π_a^{crit} . Following Lemma 3.3, the actions of the others can be arbitrary. Observe the π_a^{crit} minimizes the expected payment (12). Thus a wants to follow π_a^{crit} . \square

3.2.2 Two Sorting Instances. In this section we present analytic solution of the 2-Fines game. We start by defining extension of π_a^{crit} , and showing no agent can benefit by deviating from it. Later, we discuss some properties of this analytic solution.

In 2-Fines, no agents are added after sorting. After the first Round the game is thus identical to 1-Fines. This recursive relation motivates us to introduce the analogues of the variables used in the previous section recursively. We use upper index to denote the game length w and number of Round, i.e. in the previous section we would use $r^{1,1}$ for the critical position r .

We extend Definition 3.8 of critical strategy to pay F if a 's position is in front of some critical position $r^{2,t}$, defined below. Note that since the second Round corresponds to 1-Fines, $r^{2,2} = r^{1,1} = r$.

Definition 3.13 (2-Critical strategy). The 2-critical strategy is

$$\pi_a^{\text{crit},2}(n_a, t_a, m_a) = \begin{cases} \sigma^F & \text{if } n_a < r^{2,t_a}, \\ \sigma^0 & \text{otherwise.} \end{cases} \quad (14)$$

Let all agents follow $\pi_a^{\text{crit},2}$. Then if $a \in \mathcal{N}^1$ does not terminate in the first Round, his expected payment in the second Round is

$$\mathcal{G}_a^2(p, n_a, k) = \mathbb{E}_{\gamma \sim B(\min(n_a, r^{2,1}) - 1, 1 - p)}[G_a^1(p, n_a - \gamma - k, k)], \quad (15)$$

where G_a^1 is the expected payment given in Corollary 3.11. In words, since all agents positioned in front of $\min(n_a, r^{2,1})$ want to pay F , a 's position decreases by $\gamma + k$, $\gamma \sim B(\min(n_a, r^{2,1}) - 1, 1 - p)$. At the new position, a is expected to pay G_a^1 .

Similarly to Definition 3.8, we define the critical position in the first Round as the smallest $r^{2,1} \in \mathbb{N}$ such that $\alpha(p, r^{2,1}, k)Q + (1 - \alpha(p, r^{2,1}, k))\mathcal{G}_a^2(p, r^{2,1}, k) \leq F$. In words, assume all agents in front of a want to pay F . In the first Round, if a pays zero he risks paying Q w.p. α and the expected payment in the second Round w.p. $1 - \alpha$. The critical position $r^{2,1}$ is the smallest position n_a at which, assuming all agents in front of that position try to pay F , it is beneficial to pay zero.

LEMMA 3.14. *Let $r^{2,t}$ be the critical position in Round $t \in \{1, 2\}$. Then $r^{2,1} \geq r^{2,2} + k$.*

PROOF. By definition, $r^{2,1}$ is the smallest such that $\alpha(p, r^{2,1}, k)Q + (1 - \alpha(p, r^{2,1}, k))\mathcal{G}_a^2(p, r^{2,1}, k) \leq F$. For a contradiction we assume that $r^{2,1} < r^{2,2} + k$. It suffices to show that $\mathcal{G}_a^2(p, r^{2,1}, k) > F$ since this inequality along with $Q > F$ violates the defining property of $r^{2,1}$.

If $r^{2,1} - k < r^{2,2} = r^{1,1}$ then for each $\gamma \geq 0$,

$$G_a(p, r^{2,1} - \gamma - k, k) = (1 - p)F + p\alpha(p, r^{2,1} - \gamma - k, k)Q,$$

see Corollary 3.11 and Proposition 3.9.

Moreover, by the definition of $r^{1,1} = r$,

$$\alpha(p, r^{2,1} - \gamma - k, k)Q > F.$$

Hence for each $\gamma \geq 0$,

$$G_a(p, r^{2,1} - \gamma - k, k) > F$$

and thus $\mathcal{G}_a^2(p, r^{2,1}, k) > F$. \square

PROPOSITION 3.15. *Let all agents follow $\pi_a^{\text{crit},2}$. Then the expected payment of $a \in \mathcal{N}$ is*

$$G_a^2(p, n_a, k) = \begin{cases} (1 - p)F + pX^2(p, r^{2,1}, n_2, k), & \text{if } n_a < r^{2,1}, \\ X^2(p, r^{2,1}, n_2, k), & \text{otherwise,} \end{cases} \quad (16)$$

where

$$X^2(p, r^{2,1}, n_2, k) =$$

$$\alpha^{\text{crit}}(p, r^{2,1}, n_a, k)Q + (1 - \alpha^{\text{crit}}(p, r^{2,1}, n_a, k))\mathcal{G}_a^2(p, r^{2,1}, k).$$

We are now ready to show the main result of this section.

THEOREM 3.16 (EQUILIBRIUM OF 2-FINES). *$\pi_a^{\text{crit},2}$ is unique equilibrium of 2-Fines.*

PROOF. The second Round, corresponding to 1-Fines, has a unique equilibrium (10). In the first Round, we can use a modification of proof of Theorem 3.12. Consider now agents in the sorted order. Using Lemma 3.3, we can again use induction over agents. For each $a \in \mathcal{N}^1$ let his strategy be $\pi_a = (q, 1 - q)$ and let all agents in front of him follow $\pi_a^{\text{crit},1}$. Then his expected payment in a Round is

$$G_a^1(p, n_a, k) = (1 - p - q)F + (p + q) \left(\alpha^{\text{crit}} Q + (1 - \alpha^{\text{crit}}) \mathcal{G}_a^2 \right), \quad (17)$$

where we drop the arguments from $\alpha^{\text{crit}}(p, r^{2,1}, n_a, k)$ for brevity. This is because w.p. $1 - p - q$ he pays F and leaves. Otherwise, since all agents in front of him follow $\pi_a^{\text{crit},1}$, he is forced to pay Q w.p. α^{crit} . The remaining option is that he proceeds to the next Round, where his expected payment is \mathcal{G}_a^2 . Strategy $\pi_a^{\text{crit},1}$ is chosen to minimize a 's expected payment (17), since $\alpha^{\text{crit}} \leq \alpha$. Therefore, a will follow it even in the first Round. \square

THEOREM 3.17. *The equilibrium strategies of both 1-Fines and 2-Fines exhibit the avalanche effect.*

PROOF. Since $\lim_{p \rightarrow 0^+} \alpha(p, n, k) = 1$ and $Q > F$, the critical position in the last Round $r^{1,1}, r^{2,2} \rightarrow \infty$. Using Lemma 3.14, the equilibrium strategies of both t -Fines satisfy $\pi_a^{\text{crit},t} \rightarrow \sigma^F \forall t = 1, 2$. Thus, $\pi_a^{\text{crit},t}$ satisfies Definition 2.3. \square

In this simplified model, decreasing the probability of ignorance virtually increases the number of state employees assigned to processing the fines. This allows the central authority to increase the total payment through advertising, rather than hiring additional employees, which may be much cheaper. We show in Section 4 that these results translate well to a more general case where non-zero number of agents enter the system in each Round.

3.2.3 Division problem. To give a partial answer to the Division problem in this setting, we will compare the total expected payment of 2-Fines with k , and 1-Fines with $2k$.

PROPOSITION 3.18. *Let $r^{2,2}$ be the critical position in the second Round of 2-Fines, and let all players follow $\pi_a^{\text{crit},2}$. Then the total expected payment is at least*

$$2F(1 - p)(r^{2,2} - 1) + 2kQ. \quad (18)$$

PROOF. In the first Round, $(1 - p)(r^{2,1} - 1)$ agents are expected to pay F , and k are forced to pay Q . In the second, the situation is analogous, so the total expected payment is

$$F(1 - p)(r^{2,1} + r^{2,2} - 2) + 2kQ.$$

The statement follows from Lemma 3.14. \square

THEOREM 3.19. *Let $Q \gg F$. Then the equilibrium strategy of $\mathbb{F}(2, F, Q, k, p, x_0)$ achieves a higher total payment than the equilibrium of $\mathbb{F}(1, F, Q, 2k, p, x_0)$ in expectation.*

PROOF. Let us denote the critical position in 1-Fines with $2k$ by $r^{1,1}(2k)$ and in 2-Fines with k by $r^{2,1}(k), r^{2,2}(k)$ respectively. In the former, $r^{1,1}(2k) - 1$ agents will pay F w.p. $(1 - p)$, and $2k$ are forced to pay Q . Therefore, the total expected payment is

$$F(1 - p)(r^{1,1}(2k) - 1) + 2kQ. \quad (19)$$

By comparing this to Eq. (18), all we need to show is that $r^{1,1}(2k) < 2r^{2,2}(k)$. By Definition 3.8 this is equivalent to $\alpha(p, 2n, 2k) < \alpha(p, n, k)$. Since $Q \gg F$, this is true by Proposition 3.6. \square

Question. Is $n_1(2k) < n_1(k) + n_1(k)/p$?

3.2.4 Three Sorting Instances. Again, we extend Definition 3.8 and Definition 3.13 of critical strategies to pay F if a 's position is in front of some critical position $r^{3,t}$, defined below. Note that since the second Round corresponds to 2-Fines, $r^{3,3} = r^{2,2} = r^{1,1} = r$ and $r^{3,2} = r^{2,1}$.

Definition 3.20 (3-Critical strategy). The 3-critical strategy is

$$\pi_a^{\text{crit},2}(n_a, t_a, m_a) = \begin{cases} \sigma^F & \text{if } n_a < r^{2,t_a}, \\ \sigma^0 & \text{otherwise.} \end{cases} \quad (20)$$

Let all agents follow $\pi_a^{\text{crit},3}$. Then if $a \in \mathcal{N}^1$ does not terminate in the first Round, his total expected payment in the remaining rounds is

$$\mathcal{G}_a^3(p, n_a, k) = \mathbb{E}_{\gamma \sim B(\min(n_a, r^{3,1}) - 1, 1 - p)} [G_a^2(p, n_a - \gamma - k, k)], \quad (21)$$

where G_a^2 is the expected payment given in Proposition 3.15. In words, a 's position decreases by $\gamma + k$. At the new position, he is expected to pay G_a^2 .

Similarly to Definition 3.8, we define the critical position in the first Round as the smallest $r^{3,1} \in \mathbb{N}$ such that $\alpha(p, r^{3,1}, k)Q + (1 - \alpha(p, r^{3,1}, k))\mathcal{G}_a^3(p, r^{3,1}, k) \leq F$.

In words, assume all agents in front of a want to pay F . In the first Round, if a pays zero he risks paying Q w.p. α and the expected payment in the remaining rounds w.p. $1 - \alpha$. The critical position $r^{3,1}$ is the smallest position n_a at which, assuming all agents in front of that position try to pay F , it is beneficial to pay zero.

4 EXPERIMENTS

We investigate two approaches based on how the agents choose their payments. In Section 4.1, we define a simple strategy based on how the agent's position changes over the course of the Queue. In Section 4.2, we use reinforcement learning to obtain a strategy which approximates equilibrium. In both cases we simplify the model by assuming the function π_a is the same for all agents.

4.1 Basic Rational Strategy

To model behaviour of real decision makers, we introduce *basic rational strategy* (BRS). Informally, each agent keeps track of a quantity he is willing to pay in each Round. If, based on his shift in Queue since last Round, he determines he will reach the beginning before T steps, his willingness to pay increases. Formally,

Definition 4.1 (basic rational strategy). Let $a \in \mathcal{N}$, (n'_a, t'_a, m'_a) be the observation of a in previous Round, and (n_a, t_a, m_a) his current observation. We call ω_a the willingness to pay of a . In the first Round a participates in, i.e. when $t_a = 0$, his willingness to pay is $\omega_a = 0$. In subsequent Round games, the willingness to pay is updated before declaring π_a according to

$$\omega_a \leftarrow \begin{cases} \min(F - m_a, \omega_a + 1), & n_a < (n_a - n'_a)(T - t_a), \\ \max(0, \omega_a - 1), & \text{otherwise.} \end{cases} \quad (22)$$

The strategy of a is to pay ω_a , i.e. $\pi_a = \sigma^{\omega_a}$.

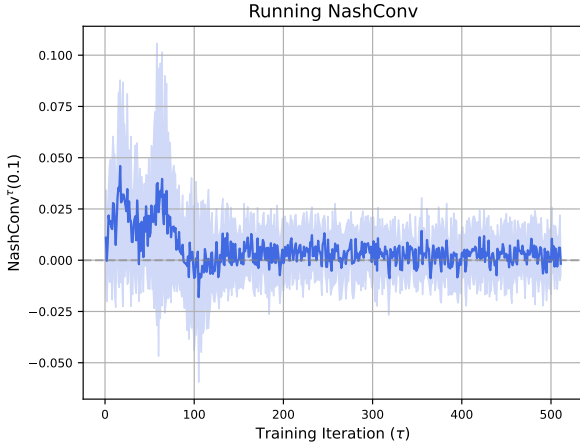


Figure 1: Evolution of NashConv during training, averaged over ten random seeds.

Note that this is a generalization of the approach introduced in Section 2.1, as π_a is not a function of only the observation in the current Round, but also depends on history. This makes this strategy non-Markovian. As such, the Definition 2.2 does not apply. However, in our experiments we simply assess the effect of agents using BRS, and make no claims regarding its optimality.

4.2 Reinforcement Learning

In order to approximate an equilibrium of Queue, we employ an iterative algorithm. In each iteration, the algorithm approximates $\bar{\pi}_a$ such that

$$\bar{\pi}_a \in \operatorname{argmax}_{\pi_a} \mathbb{E}_{(\bar{\pi}_a, \pi_{-a})} [u_a(\bar{\pi}_a, \pi_{-a})]. \quad (23)$$

In words, we find $\bar{\pi}_a$ such that it maximizes utility of a , assuming $\mathcal{N} \setminus \{a\}$ follow π . We denote as τ the iteration of the learning algorithm and π^τ the strategy the algorithm approximates the best-response against in iteration τ .

We use PPO [7] to find $\bar{\pi}$, utilizing trajectories of all terminal agents for the update. For details on our implementation, see Appendix A. This approach is not guaranteed to converge in general but if it does converge, the resulting strategy is an equilibrium [3]. Similar approach was successfully used before [1].

4.2.1 NashConv. In order to quantify the quality of the learned solution, we adapt the notion of NashConv [6]. NashConv measures the negative difference in utility agents are expected to receive under π^τ and the approximate best-response $\pi^{\tau+1}$. We approximate the latter by having a fraction of agents ρ follow $\pi^{\tau+1}$ while the rest follows π^τ . Formally,

Definition 4.2 (NashConv). Let each agent added to Queue follow $\pi^{\tau+1}$ w.p. ρ and π^τ otherwise. Let $\bar{\mathcal{N}}$ be the set of agents following $\pi^{\tau+1}$ and their expected utility

$$\mathcal{EU}(\rho, \pi^{\tau+1}, \pi^\tau) = \mathbb{E}_{\left(\pi_{\bar{\mathcal{N}}}^{\tau+1}, \pi_{-\bar{\mathcal{N}}}^\tau\right)} \left[u_a(\pi_a^{\tau+1}, \pi_{-a}^\tau) | a \in \bar{\mathcal{N}} \right].$$

Then

$$\text{NashConv}^\tau(\rho) = \mathcal{EU}(\rho, \pi^{\tau+1}, \pi^\tau) - \mathbb{E}_{\pi^\tau} [u_a(\pi^\tau)]. \quad (24)$$

NashConv and ϵ -equilibrium are closely connected. If ρ is small enough such that $|\bar{\mathcal{N}}| \ll |\mathcal{N}|$, then $\text{NashConv} \approx \epsilon$. In Figure 1 we present a representative example of the evolution of NashConv during learning. We averaged the results over ten random seeds, and also show the standard error. The results suggest that, although there is a considerable amount of noise, the algorithm was able to reach a sufficiently close approximation of the equilibrium. Moreover, we verified this trend translates to other experiments presented below.

4.3 Results

In this section, we numerically demonstrate the Avalanche effect and the Division problem. Specifically, we show the total expected revenue, which is given as

$$\mathbb{E}_\pi \left[\sum_{a \in \mathcal{T}} m_a \right]. \quad (25)$$

Unless stated otherwise, we use $F = T = 4$, $Q = 6$, $x = x_0 = 32$, $k = 2$ and $p = 1/2$ in all our experiments.

4.3.1 Avalanche Effect. In Figure 2 we show the total expected payment as a function of the probability of ignorance p , and the number of entering agents x . The results suggest that the Queue exhibits the Avalanche effect in a general setting. In fact, it exhibits both properties of Definition 2.3. Interestingly, the learned solution achieves a considerably lower total payment compared to BRS.

4.3.2 Division problem. In this section we numerically study the Division problem introduced in Section 2.4. Results for both the Time- and Group-Division problem are presented in Figure 3.

For the Time-Division problem, BRS seems to drastically overpay the learned strategy if the sorting is frequent, i.e. T is large. On the other hand, when T is small the willingness to pay doesn't increase. This leads to paying only $kQ = 48$ for $T = 1$, while the learned strategy prefers to pay more. When the game is sorted more often, the learned strategy seems to favor lower total payments.

In the Group-Division scenario, both BRS and the learned strategy pay less in larger system. Splitting the game into several smaller thus increases the total payment of the offenders. This is in agreement with the analytic solution presented in Section 3.2.2, suggesting the incoming agents don't impact Queue much.

5 CONCLUSION

In this work, we suggest a simple mechanism for collecting fines for traffic violations in large cities, by a small number of administrators. We show analytically and on realistic experiments that this simple mechanism exhibits the Avalanche effect and thus supports non-cooperation of offenders. We quantify the fines collection in expectation. Finally, we present some initial results towards understanding the effective use of the administrators, i.e., the Division problem.

Future work: Further study of the Division problem, in particular possible strengthening of Lemma 3.14 and proving Conjecture 3.7 is our work in progress.

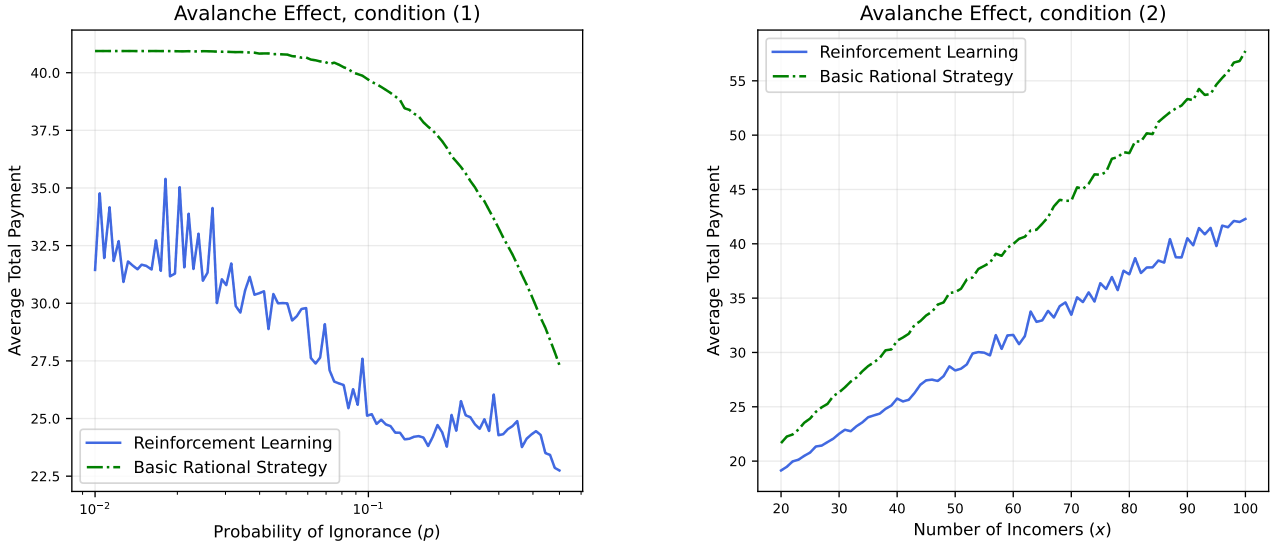


Figure 2: Expected total payment of terminal agents for varying probability of ignorance p (left) and number of incoming offenders x (right). The figures demonstrate the Avalanche effect defined in Section 2.3.

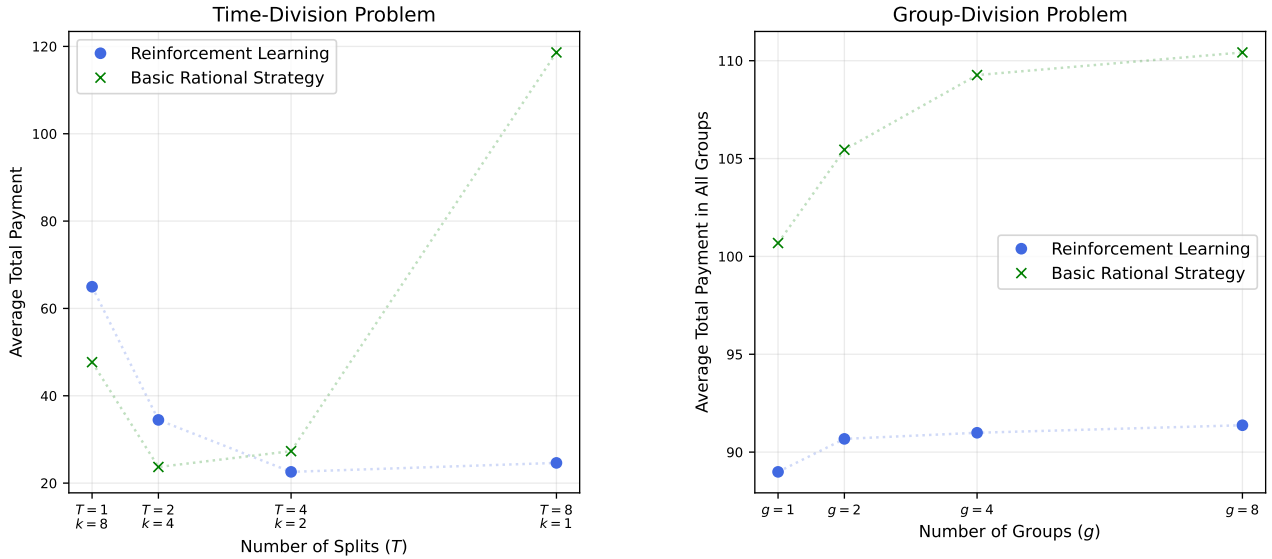


Figure 3: Expected total payment of terminal agents for varying number of sortings T (left) and number of splits g (right). The figures investigate the Division problem defined in Section 2.4.

We see a limitation of our numerical approach in that we limit ourselves to scenarios where all agents share the same strategy π_a . We would like to improve on our results by having each agent follow a leader, and training each leader separately. In this framework, we could also access the exploitability of BRS, by having the learned agents in the same system.

A LEARNING ALGORITHM

The shared strategy π_a is represented by a neural network and trained from trajectories of all terminal agents. When selecting the strategy for a Round, we mask all actions which would lead to $m_a + \mu_a > F$. This makes the agents unable to overpay the fine F .

We use fully-connected networks for both the actor and the critic. Both accept the scaled observation of a in Round, i.e. (n_a, t_a, m_a) .

The actor network has two hidden layers with four hidden units, and the critic has three hidden layers with 32 units each, all using the ReLU activation function. The rest of the hyperparameters are given in Table 1.

Parameter	Value	Description
ϵ	0.05	Policy update clipping
γ	1	Reward discounting
λ	0.95	Advantage decay factor
N_{train}	16	Number of training updates per cycle
N_{epochs}	512	Number of training epochs
N_{train}	10^4	Train buffer size
α_{actor}	$3 \cdot 10^{-4}$	Actor learning rate
α_{critic}	10^{-3}	Critic learning rate
c_H	10^{-3}	Entropy regularization weight
\bar{c}	0.1	Gradient norm clipping

Table 1: Hyperparameters of the learning algorithm.

ACKNOWLEDGMENTS

This work has been supported by the E-POKUTY TACR project no. TL05000450. Computational resources were supplied by the project e-Infrastruktura CZ (e-INFRA CZ LM2018140) supported by the Ministry of Education, Youth and Sports of the Czech Republic.

REFERENCES

- [1] Bowen Baker, Ingmar Kanitscheider, Todor Markov, Yi Wu, Glenn Powell, Bob McGrew, and Igor Mordatch. 2020. Emergent Tool Use From Multi-Agent Autocurricula. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=SkxpxJBKwS>
- [2] A. Lee Chiam C., Li J. 2020. The Bidding Elimination Game. (2020). <https://web.stanford.edu/class/aa228/reports/2020/final54.pdf>
- [3] Dibya Ghosh, Marlos C. Machado, and Nicolas Le Roux. 2020. An Operator View of Policy Gradient Methods. In *Proceedings of the 34th International Conference on Neural Information Processing Systems (Vancouver, BC, Canada) (NIPS'20)*. Curran Associates Inc., Red Hook, NY, USA, Article 286, 10 pages.
- [4] Spencer Greenberg and Mehryar Mohri. 2014. Tight lower bound on the probability of a binomial exceeding its expectation. *Statistics & Probability Letters* 86 (2014), 91–98. <https://doi.org/10.1016/j.spl.2013.12.009>
- [5] de Campagnolle M. R. Kobylanski M., Quenez† M. 2013. Dynkin games in a general framework. <https://arxiv.org/abs/1202.1930>
- [6] Marc Lanctot, Vinicius Zambaldi, Audrunas Gruslys, Angeliki Lazaridou, Karl Tuyls, Julien Perolat, David Silver, and Thore Graepel. 2017. A Unified Game-Theoretic Approach to Multiagent Reinforcement Learning. In *Advances in Neural Information Processing Systems*, I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (Eds.), Vol. 30. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2017/file/3323fe11e9595c09af38fe67567a9394-Paper.pdf>
- [7] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal Policy Optimization Algorithms. *CoRR* abs/1707.06347 (2017). <http://dblp.uni-trier.de/db/journals/corr/corr1707.html#SchulmanWDRK17>